


Pavilion CF/HID

Project Name	Type
Catalog Number	



Dimensional Drawings

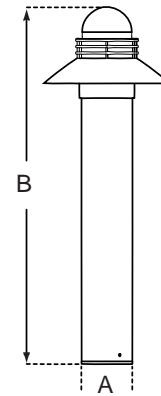

Fixture	A	B	Max. Watts	Lbs
PVB-1	6"	42"	70 W	35

The **Pavilion** bollard combines contemporary styling with architectural appeal. Match the **Pavilion** bollard to Visionaire Lighting's **Pavilion II** area fixture (see Architectural section) for an exciting, uniform project look. This bollard provides smooth, low-level, 360-degree, symmetrical illumination. It is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways and landscaped areas.

Lens: Clear, high-impact-resistant acrylic, with silicone gasketing for a weather-tight seal. An optional internal light shield is available.




Housing: Extruded aluminum 6" diameter housing with spun aluminum top cap. Heavy-duty, cast aluminum base plate concealed within shaft is designed for standard anchor bolt mounting to a concrete base. Galvanized anchor bolts are 3/8" x 12".

Finish: Durable Quali-Guard® textured, thermoset polyester powder coat, available in a selection of architectural or custom colors. Finish is guaranteed for two (2) years.

Optics: Prismatic glass refractor with clear acrylic horizontal louvers providing Type V symmetrical light distribution.

Lamp: **HID** – 50 to 70 watts offered in High Pressure Sodium; or Pulse Start Metal Halide for superior efficiency, lumen maintenance and color rendition. **CF** – 26 to 42 watts in Compact Fluorescent.

Ballast: **HID** – a premium HPF regulating autotransformer, available in High Pressure Sodium or Pulse Start Metal Halide. **CF** – a high-performance electronic transformer operates at 120 thru 277 volts, 50 to 60 Hz, with a 90% power factor, and is rated for -20 °C operation.

Model	Size	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
PVB-1	6" Round 36" (6R36)	Type V Glass Refractor (GR5) 	HID	PS HPS (P) (S)	120 (1)	Anchor Base (AB)	Bronze (BZ)	Fusing *Specify voltage Single in-line fuse (SF120) (SF277) Double in-line fuse (DF208) (DF240) (DF480)
			50 (50)		208 (2)		Black (BK)	
	42" (6R42)		70 (70)		240 (3)		White (WH)	Internal Light Shield (ILS)
		Compact Fluorescent	CF (CF)	277 (4)	Forest Green (FG)	Emergency Battery Pack *CF only. Gives 90+ minutes of illumination during power outages. (EBP)		
			*120-277 V universal voltage 26 (26DT)		480 (5)		Grey (GY)	
			32 (32TT)		M-Tap *Multi-Tap ballast wired at 277 V unless specified (6)		Silver Metallic (SL)	Cold Weather Battery Pack *CF only. Gives 90+ minutes of illumination during power outages. Rated to -20 °C. (CLDPK)
			42 (42TT)		347 (8)		Brushed Aluminum (BA)	
Pair with:					120-277 *Universal voltage (UNV)		Soft Gold (SG)	
 Pavilion II Architectural fixture.							Custom Color (CC)	Base Template 6" Round Bollard Ø 6" 

For more detailed information on mounting, wiring or installation instructions, please consult factory. If poles are not ordered with fixtures, please specify mounting requirements. This document contains proprietary information of Visionaire Lighting, LLC. Any use of this information requires the written approval of Visionaire Lighting, LLC. In keeping with our TQM policy of continuous improvement, Visionaire reserves the right to change any specifications contained herein without prior notice.



19645 Rancho Way • Rancho Dominguez, CA • 90220
Tel: (310) 512-6480 • Fax: (310) 512-6486
www.visionairelighting.com