


Project Name	Type
Catalog Number	

Monterey - Sconce

HID/CF



Dimensional Drawings

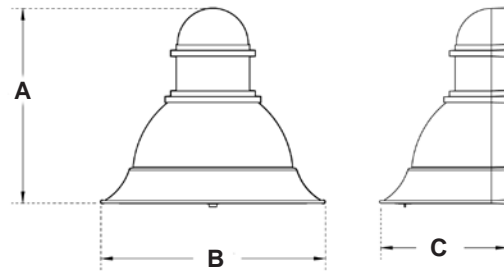

Fixture	A	B	C	Max. Watts	Lbs
MOS-1	14 ^{3/4} "	13"	8 ^{3/4} "	42 W	19
MOS-2	20"	17 ^{3/4} "	11 ^{1/2} "	150 W	27

The **Monterey - Sconce** offers architectural styling for wall mounted applications, while complementing the **Monterey** series of lighting products. The unique design captures the rustic look and feel of the Southwest. The **MOS-2** meets NEC egress/emergency specifications when the CF/EBP options are selected.

Lens: The lens is a clear, tempered, flat glass, secured by aluminum lens retainers and fully gasketed.

Housing: The **Monterey - Sconce** consists of a durable, cast aluminum housing and lens door frame with tool-less latch.

Finish: A Quali-Guard® textured, thermoset, polyester powder coat paint, oven baked at a temperature of 400 °F to promote maximum adherence

and finish hardness and is available in a wide array of architectural colors. Finish is guaranteed for two (2) years.

Optics: The reflector is sharp-cutoff, specular, segmented aluminum, and offered in three distribution types.

Lamp: A selection of Compact Fluorescent (26-84 watts) and HID light sources (70-150 watts) are offered; including Pulse Start Metal Halide for superior efficiency, lumen maintenance and color rendition.

Ballast: **HID** - Premium HPF regulating autotransformer, available in High Pressure Sodium or Pulse Start Metal Halide. **CF** - A high-performance, electronic transformer operates at 120 thru 277 volts, 50 to 60 Hz, with a 90% power factor, and is rated for -20 °C operation.

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
MOS-1	Type II (T2)	Compact Fluorescent *120-277 V universal voltage	CF (CF)	120 (1)	Wall Mount (WM)	Bronze (BZ)	<u>Button-Type Photocell</u> *Specify voltage (PC120) (PC208) (PC240) (PC277) <u>Fusing</u> *Specify voltage Single in-line fuse (SF120) (SF277) Double in-line fuse (DF208) (DF240) (DF480)
	Type III (T3)	26 (26)		208 (2)		Black (BK)	
		32 (32)		240 (3)		White (WH)	
MOS-2	Type IV (T4)	HID	PS (P) HPS (S)	277 (4)	Forest Green (FG)	Silver Metallic (SL)	Emergency Battery Pack *CF only. Gives 90+ minutes of illumination during power outages. Rated to 32 °C. (EBP)
		70 (70)		480 (5)			
	100 (100)	M-Tap *Multi-Tap ballast wired at 277 V unless specified	Cold Weather Battery Pack *CF only. Gives 90+ minutes of illumination during power outages. Rated to -20 °C. (CLDPK)				
	150 (150)			Compact Fluorescent *120-277 V universal voltage	CF (CF)		
	26 (26)						
32 (32)	120-277 (UNV)						

For more detailed information on mounting, wiring or installation instructions, please consult factory. If poles are not ordered with fixtures, please specify mounting requirements. This document contains proprietary information of Visionaire Lighting, LLC. Any use of this information requires the written approval of Visionaire Lighting, LLC. In keeping with our TQM policy of continuous improvement, Visionaire reserves the right to change any specifications contained herein without prior notice.



19645 Rancho Way • Rancho Dominguez, CA • 90220
 Tel: (310) 512-6480 • Fax: (310) 512-6486
 www.visionairelighting.com