


Silhouette HID/CF

Project Name	Type
Catalog Number	



Dimensional Drawings

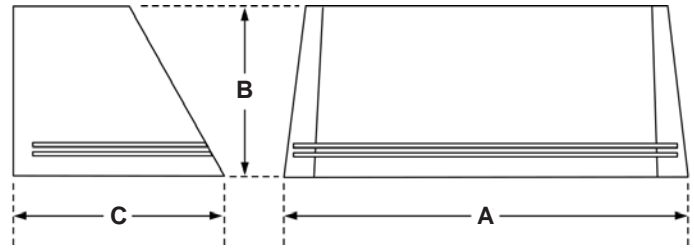

Fixture	A	B	C	Max. Watts	Lbs
SIL-1	12½"	5¼"	7"	42 W	15
SIL-2	17½"	6¼"	8¼"	150 W	21
SIL-3	26½"	10"	12"	400 W	30

The **Silhouette** wall sconce is a low-profile, designer luminaire that provides excellent, uniform illumination with Dark-Sky approved, sharp-cutoff optics. The **Silhouette** meets NEC egress/emergency specifications when the CF/EBP options are selected.

Lens: The lens is clear, tempered, flat glass; secured with galvanized retainers and fully sealed with a form-fitting, silicone gasket.

Housing: The trapezoidal **Silhouette** is of one-piece precision-cast aluminum construction, in a pleasing architectural design with decorative reveal. It features a one-piece, precision cast aluminum, hinged door frame; and a ribbed back plate that maximizes heat dissipation to extend the life of both lamps and ballasts/transformers. The larger **Sil-2** and **Sil-3** adds tool-less entry via a convenient, quarter-turn thumb latch. All come supplied with a quick-mount bracket for ease of installation.

Finish: Durable Quali-Guard® textured thermoset polyester powder coat, oven-baked at a temperature of 400 °F to promote maximum adherence and finish hardness. Finish is guaranteed for two (2) years.

Optics: The reflector is sharp-cutoff, specular, segmented aluminum, available in three distribution types.

Lamp: A selection of Compact Fluorescent (26 to 84 watts) and HID light sources (50 to 400 watts) are offered; including Pulse Start Metal Halide for superior efficiency, lumen maintenance and color rendition.

Ballast: **HID** – Premium HPF regulating autotransformer, available in High Pressure Sodium or Pulse Start Metal Halide. **CF** – A high-performance, electronic transformer operates at 120 thru 277 volts, 50 to 60 Hz, with a 90% power factor, and is rated for -20 °C operation.

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
SIL-1 <small>*Available in T4 only</small>	Type II (T2) 	Compact Fluorescent <small>*120-277 V universal voltage</small> 26 (26) 32 (32) 42 (42)	CF (CF)	120 (1) 208 (2) 240 (3)	Wall Mount <small>*Down light only (DL)</small>	Bronze (BZ) Black (BK) White (WH) Forest Green (FG) Grey (GY) Silver Metallic (SL) Custom Color (CC)	<u>Button Type Photocell</u> <small>*Specify voltage</small> (PC120) (PC208) (PC240) (PC277) Fusing <small>*Specify voltage</small> Single in-line fuse (SF120) (SF277) Double in-line fuse (DF208) (DF240) (DF480) Quartz Restrike (QR) Wire Guard <small>*SIL-2 and SIL-3 only</small> (WG) Emergency Battery Pack <small>*CF only. Provides a minimum of 90 minutes of illumination during power outages</small> (EBP) Cold Weather Battery Pack <small>*CF only. Gives 90+ minutes of illumination during power outages. Rated to -20 °C.</small> (CLDPK)
	Type III (T3) 	HID 50 (50) 70 (70) 100 (100) 150 (150)	PS HPS (P) (S)	277 (4) 480 (5)			
SIL-2	Type IV (T4) 	Compact Fluorescent <small>*120-277 V universal voltage</small> 42x2(42TTx2)	CF (CF)	M-Tap <small>*Multi-Tap ballast wired at 277 V unless specified</small> (6)			
		HID 200 (200) 250 (250) 320 (320) 400 (400)	PS HPS (P) (S)	347 (8) 120-277 <small>*Universal voltage (UNV)</small>			
SIL-3							

For more detailed information on mounting, wiring or installation instructions, please consult factory. If poles are not ordered with fixtures, please specify mounting requirements. This document contains proprietary information of Visionaire Lighting, LLC. Any use of this information requires the written approval of Visionaire Lighting, LLC. In keeping with our TQM policy of continuous improvement, Visionaire reserves the right to change any specifications contained herein without prior notice.



19645 Rancho Way • Rancho Dominguez, CA • 90220
Tel: (310) 512-6480 • Fax: (310) 512-6486
www.visionairelighting.com